


Economical PVC ozone resistant tubing that can be used for ozone concentrations up to 1.5% ozone. For lower ozone concentration applications this alternative to Teflon is a very cost effective solution.

Features:

- Can be used with ozone concentrations up to 1.5% by wt
- Flexible to -40°F
- High working temp (170°F)
- Does not contain Plasticizers
- Significantly more flexible than standard polyethylene tubing

Size View:

Unit: mm [inch]

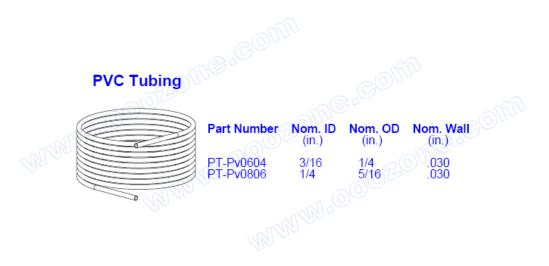

- 21 -