


Ozone Generator Cell **FQM-518**

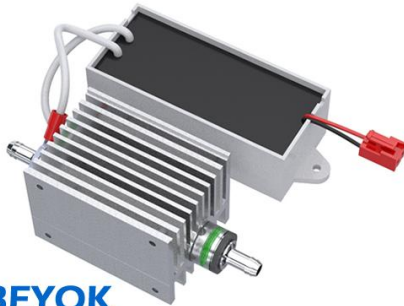

BEYOK
百悦康☆☆☆☆

Ozone Output:	500 mg/hr @ air
External gas source:	2-5L/min@air; 0.5-2L/min@oxygen
Ozone Generating Method	Corona Discharge
Electrical:	DC12V-DC24V, 10W
Ozone Outlet Connection:	Φ 5.5mm pagoda joint
Case:	Plastic
Accessory:	Hose +Air stone (Optional)
Dimension(LxWxH):	3.1"*1.4"*1.0"(80*35*26 mm); 1.6"*1.6"*3.9"(40*40*100 mm);
Installation Dimension(LxW):	3.5"(90 mm)
Net Weight:	- kg

The FQM-series ozone generator cells use ozone core discharge of invention patent, including the fission design of ozone generator tube and ozone driving circuit, they can provide stable and efficient ozone output, easy to install and maintain.

Features:

- New high efficiency dielectric barrier discharge technology
- Widely used in large quantities
- Able to connect with air dryer through air inlet to increase ozone output
- Reliable quality
- Stable& efficient output
- Long working life

Benefits:

- High efficient broad-spectrum sterilization
- Good dispersion
- Without ozone residual and secondary pollution

Application:

- Washing machine, dishwasher, water machine, water purification machines, coin-operated sale water, fruit and vegetable detoxification machines, aquatic animals, the spa machine, surfing bathtub, slimmer.
- Medical apparatus and instruments, air purifier, disinfection cabinet, refrigerator, dryer, shoe ark, wardrobe, beauty equipment, oxygen machine, toilet, incubator, car.

Size View:

